

RF Presenter

aimMaster LT® software supports one button to : open files, play Power Point, switch AP, display Timer, etc.

FEATURES >>

- 2.4 GHz RF wireless transmission provides up to 20 meters omni directional working range.
- Unique binding mechanism click presenter and USB receiver together to prevent receiver lose.
- Built-in Laser pointer function.
- Store presenter and receiver in Express 54 card slot for easy travel.
- Support **aimMaster LT**® software.
- Control media player while presenting.
- Value application for more functions.



aimMaster LT



RC203 / 607

SPECIFICATIONS >>

Transmitter

- Frequency Band >> 2.4 GHz~2.483 GHz unlicensed ISM Band.
- Range >> Up to 20 meters(6') line of sight (free space).
- Software Type >> **aimMaster LT**®
- Laser >> Class 2 Laser.
- Battery >> CR 2032.
- Certification Approval >> CE 、FCC.
- Operating Voltage >> 3V.
- Dimension >> 75 x 34 x 5mm(3" x 1.3" x 0.2").
- Weight w/ battery >> 10.6g ± 1g(0.37 oz ± 0.03 oz).
- Weight w/o battery >> 13.6g ± 1g(0.47 oz ± 0.03 oz).

Receiver

>> 2.4 GHz~2.483 GHz unlicensed ISM Band.
>> 20 meters(6') (free space).

>> CE 、FCC.

>> 5V (5V from USB interface).

>> 53 x 24 x 5 mm(2" x 0.9" x 0.2").


>> 3.5g ± 1 g(0.14 oz ± 0.04oz).



Laser



Present




2 in 1



Clock

aimMaster LT®(for Windows only) FEATURES >>

- Plug & Play.
- Open Files and Start PowerPoint.
- Laser-locked Protection .
- Switch / Exit AP.
- Play / Pause Multimedia.
- Timer Display.
- Blank Screen.
- Select from Links.
- Kiss-Binding eases the pairing between Presenter & Receiver.

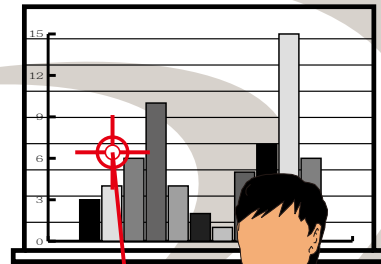

SYSTEM REQUIREMENTS >>

- 512MB RAM recommended.
- Support Microsoft® Windows® 2000 / XP / Vista.
- USB Port ; PC platform.
- CD-ROM drive or DVD-ROM drive.
- Suggestion pairing distance is 5cm(2").

www.aimpro21.com

Formosa21 Inc.
8F-6, No.351, Chung Shan Rd.,Sec. 2 Chung Ho City, Taipei, Taiwan, R.O.C.
TEL : 886-2-3234-7000
FAX : 886-2-3234-8969

Formosa21 U.S.A., Inc.
21540 Praire Street, Unit A, Chatsworth, CA 91311 U.S.A.
TEL : 1-818-407-4965
FAX : 1-818-407-4966

